



HRC 300

Like a high-end sports car, the revolutionary HRC 300 is fast, easy to handle and loaded with advanced features.

Our designers have combined the simplicity of touch-screen programming with the flexible speed of digital electronics in a weather-resistant outdoor/indoor package. The result: a tough, versatile controller that's remarkably quick and easy to program – one that's built for reliable, long-lasting performance.

FEATURES AND BENEFITS

- **Easy-to-read touch-screen LCD display**—The blue, back-lit, touch-screen display – the industry's largest – is easy to read under any lighting conditions. Use either your finger or the built-in stylus to set up programming
- **Three programs for watering flexibility**—Any watering station can be assigned to one or more of the HRC 300's three different programs
- **Programming data safely stored**—Power out? Batteries run down? No worries! All programming information is stored indefinitely in the timer's non-volatile memory
- **Choice of five languages**—Easily set the LCD display to read in any of five languages
- **Water budgeting feature**—Match seasonal watering needs by increasing or decreasing the watering durations of the stations in any of the three programs from 10% to 200% of the scheduled program
- **Lock-down security**—The HRC 300 comes standard with an integrated lock on the outer door, and a key for tamper-proofing and theft prevention

BUILT FOR SPEED FEATURES


- **Optional rain sensor capabilities**—The controller is sensor-ready, with no additional wireless receiver required
- **Remote control capabilities**—The HRC 300 is remote-ready. Using its remote control unit (purchased separately), you can turn stations on and off and perform programming from anywhere within a 300 feet line-of-sight range
- Intuitive, touch-screen programming ease.



MODELS

HRC-300-06-NA	6 Station Indoor/Outdoor Controller
HRC-300-12-NA	12 Station Indoor/Outdoor Controller
HRC-300-12-TR	6-12 Station RF Transmitter
HRC-300-RS-RF	Wireless Rain Sensor w/Freeze Option

HOW TO SPECIFY

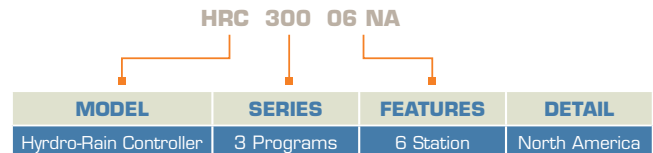



HRC 300

complete with walk-through start-up program

- Easy mounting
- Integrated rain/freeze sensor receiver requires no additional wall mount installation. Just mount the rain/freeze transmitter on the rain gutter, sync and go
- “Plug-n-play” electrical cord

OPERATING SPECIFICATIONS

- Station timing: 1 to 240 minutes per station
- Automatic Starts: Up to ten start times per day
- Programming Schedule: Days of week, interval, odd and even days, delay (1 to 99 days)

ELECTRICAL SPECIFICATIONS

- Transformer output: 24VAC/26VAC, 650mA
- Battery backup: 3V lithium (program saved in non-volatile memory)
- Surge Protection: Primary input has built-in MOV (metal oxide varistor)
- UL listed / CE approved
- Wire terminal: screw-less



04030-36 Rev A