

# Spectrum™ 360° Adjustable Flow



An adjustable flow, full circle vortex sprayer with fine water droplets. Flow and coverage can be altered by rotating the cap.

## Features


- Finger-tip flow control with shut-off option.
- Spike model to anchor Spectrum™ at the plant.
- Barb model for direct attachment to feeder and supply lines.
- Threaded model for installation into Rigid Risers and Asta® Stakes.
- 1/2" Threaded model for riser pipe installations.

## Applications


Pots, tubs, ground cover, landscaped gardens and nurseries. Waters large garden areas when used with Asta® Stakes and risers.

Performance		360°	
	PRESSURE (psi)	FLOW (gph)	DIAMETER (ft)
fully open (approx. 22 clicks)	15	17.3	9.4
	20	19.8	11.2
	30	24.3	13.3

## Flow Rate

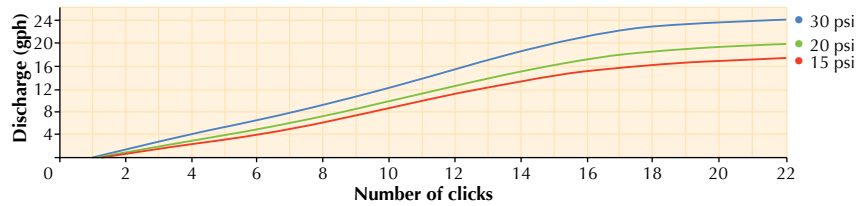

## Diameter of Throw

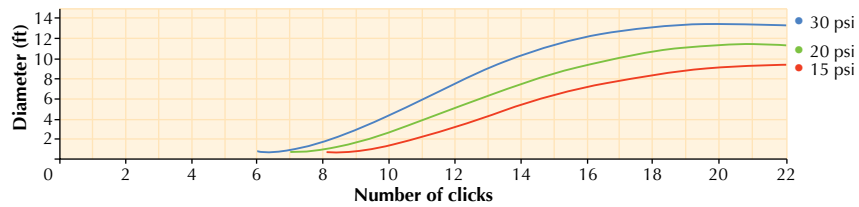

## Spectrum™ 360°

BASE TYPE	PART NUMBER	PACK QUANTITY	PACKS PER CARTON	CARTON (lbs)
Barb 0.16"	32045	50	50	13.8
Thread 10-32 UNF	32015	50	50	15.7
Thread 1/2" FNPT	32025	25	50	15.6
Spike	32095	25	40	15.3

## Specifications

DIMENSIONS ASSEMBLED		BARB	THREAD	TAPER	THREAD 1/2"	SPIKE
HEIGHT		1.0"	1.0"	1.0"	1.5"	5.3"
WIDTH		0.8"	0.8"	0.8"	1.0"	1.7"
DEPTH		0.6"	0.6"	0.6"	1.0"	0.6"
WEIGHT (approx)		0.06 oz	0.07 oz	0.10 oz	0.17 oz	0.19 oz
UV STABILIZED MATERIAL	BASE CAP DEFLECTOR	polypropylene polypropylene acetal	acetal polypropylene acetal	acetal polypropylene acetal	polypropylene polypropylene acetal	polypropylene polypropylene acetal
BASE/CONNECTION TYPE: Inlet		BARB 0.16"	10-32 UNF THREAD	TAPER # 6 (Refer Page 4.0)	THREAD 1/2" FNPT	BARB 0.16"



Spectrum™ Spike 0.16" with adapter



Spectrum™ Barb 0.16"

Spectrum™ Thread 10-32 UNF



Spectrum™ Thread 1/2"